

# QT892P

## Glazing Foam - PVC Double Sided Tape


Modified Acrylic Adhesive - (External / Internal)

White / Black. Widths available from 6mm to 1000mm

Thicknesses .1mm,1.5mm, 2mm, 3mm, 4mm, 5mm, 6mm, 8mm,10mm,12mm

**QT892** is a high grade, high adhesion 200kg density security glazing foam.

The PVC foam is coated with a modified acrylic adhesive designed to withstand working temperatures ranging from -30 °C to +120°C. Its natural ability to compress makes it ideal for use on rough and textured surfaces by conforming to the shape of the surface it is applied to when pressure is applied either by hand or roller during application, effectively levelling the surface it comes into contact with. It has excellent acoustic dampening properties and is also an ideal medium for absorbing and cancelling mechanical vibration between the surfaces it is adhered to. It withstands shock and copes well with substrates of differing thermal expansion properties. It is unaffected by UV and ageing and acts as an ideal gap-fill and seal. It can be supplied in white or black to aesthetically enhance the appearance of joins when bonding substrates of a similar colour. Typical applications include glazing of windows and assembly of interior and exterior signage.

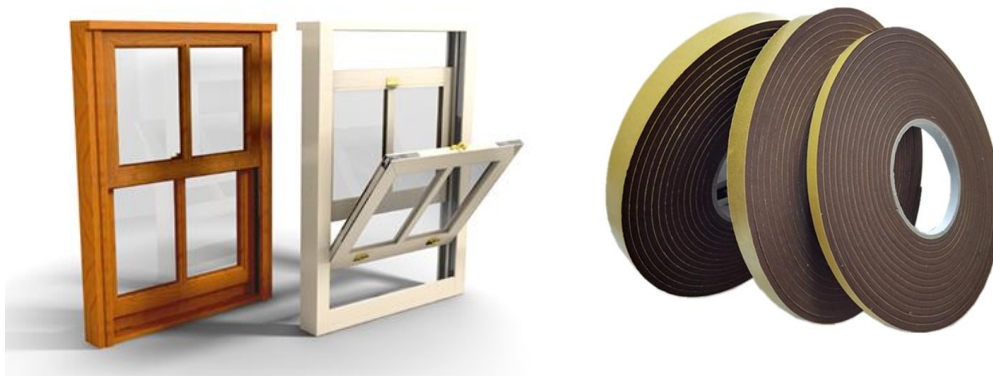

Approved to BS 6206 security glazing standards. Ideal for timber frames.